


# 康伟栅栏式PCB接线端子

产品规格书



CE



KV13-A

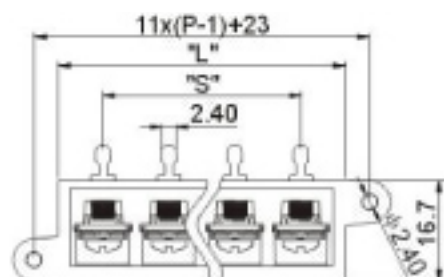

"S" = 11x(P-1)  
"L" = 11x(P-1)+15

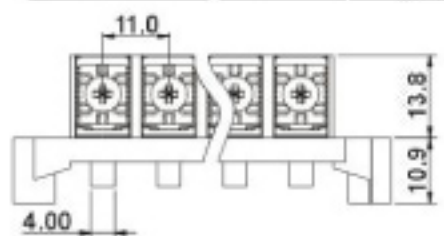

极数	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	26.00	37.00	48.00	59.00	70.00	81.00	92.00	103.00	114.00	125.00	136.00	147.00	158.00	169.00
S(mm)	11.00	22.00	33.00	44.00	55.00	66.00	77.00	88.00	99.00	110.00	121.00	132.00	143.00	154.00
极数	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	180.00	191.00	202.00	213.00	224.00	235.00	246.00	257.00	268.00	279.00	290.00			
S(mm)	11.00	22.00	33.00	44.00	55.00	66.00	77.00	88.00	99.00	110.00	121.00	132.00	143.00	

认证

电气性能

参考标准

额定电压

额定电流

导线线径

耐电压

绝缘阻抗

机械性能

最大锁紧扭力

环境温度

尺寸

间距

极数

材质及电镀

塑件

端子

螺丝

CE

UL

IEC

300V

250V

30A

41A

18-10AWG

6.0mm<sup>2</sup>

AC2000V/1Min

1000M Ω/DC500V

1.2N.m 10.6Lb.in

-40℃~+90℃

11.0mm(.433")

2P-11P

PC,UL94V-2

黄铜,1.2厚 镀金

钢, M4镀金

订购方式:




型号


极数

颜色

1	灰色	4	绿色
3	黑色		



中国·康伟电子有限公司



NAME

KV13-A