


康伟栅栏式PCB接线端子


产品规格书



| | | |
|--------|-----------------|--------------------|
| 认证 | UL | CE |
| 电气性能 | UL | IEC |
| 参考标准 | 300V | 750V |
| 额定电压 | 25A | 32A |
| 额定电流 | 22-12AWG | 4.0mm ² |
| 导线线径 | AC2000V/1Min | |
| 耐电压 | 500MΩ/DC500V | |
| 绝缘阻抗 | 机械性能 | |
| 机械性能 | 最大锁紧扭力 | |
| 最大锁紧扭力 | 1.2Nm/10.6Lb.in | |
| 环境温度 | -40℃~+105℃ | |
| 尺寸 | 9.5mm(.375") | |
| 间距 | 2P-20P | |
| 极数 | 材质及电镀 | |
| 材质及电镀 | 塑件 | |
| 塑件 | PA66, UL94V-0 | |
| 端子 | 黄铜, 0.8厚 镀锡 | |
| 螺丝 | 钢, M4镀锌 | |

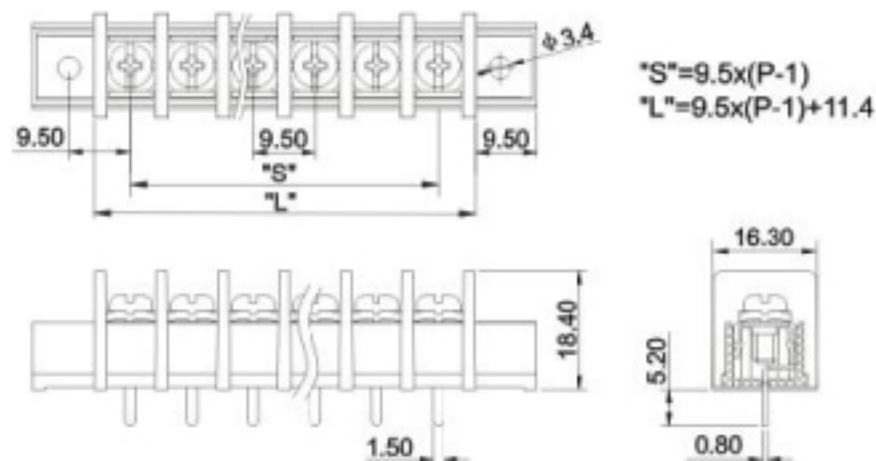

订购方式:

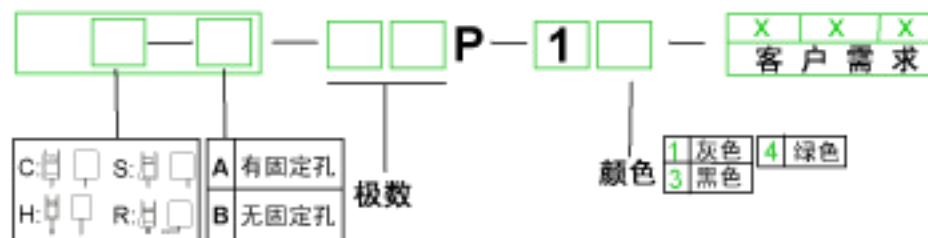

| | | | | | | | | | | | | | | |
|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 极数 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |
| L(mm) | 20.90 | 30.40 | 39.90 | 49.40 | 58.90 | 68.40 | 77.90 | 87.40 | 96.90 | 106.40 | 115.90 | 125.40 | 134.90 | 144.40 |
| S(mm) | 9.50 | 19.00 | 28.50 | 38.00 | 47.50 | 57.00 | 66.50 | 76.00 | 85.50 | 95.00 | 104.50 | 114.00 | 123.50 | 133.00 |
| 极数 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | |
| L(mm) | 53.90 | 63.40 | 72.90 | 82.40 | 91.90 | 101.40 | 110.90 | 120.40 | 129.90 | 139.40 | 148.90 | | | |
| S(mm) | 27.50 | 37.00 | 46.50 | 56.00 | 65.50 | 75.00 | 84.50 | 94.00 | 103.50 | 113.00 | 122.50 | | | |

| | |
|--------------|--------------------|
| mm (INCH) | 中国·康伟电子有限公司 |
| | |
| NAME | KV45C-A |