



# 康伟栅栏式PCB接线端子


产品规格书

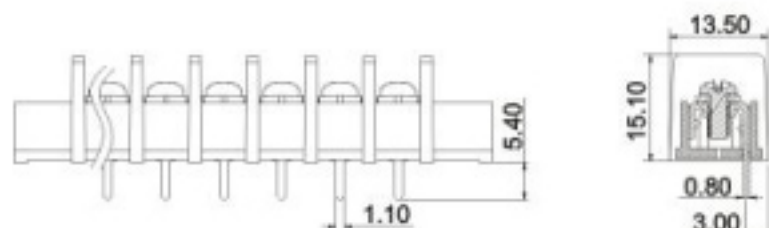

认证	UL IEC	
电气性能	UL	IEC
参考标准	UL	IEC
额定电压	300V	450V
额定电流	20A	24A
导线线径	22-12AWG	2.5mm <sup>2</sup>
耐电压	AC2000V/1Min	
绝缘阻抗	500MΩ/DC500V	
机械性能		
最大锁紧扭力	0.5Nm / 4.4Lb.in	
环境温度	-40℃~+105℃	
尺寸		
间距	8.25mm(.325")	
极数	2P-24P	
材质及电镀		
塑件	PA66, UL94V-0	
端子	黄铜, 0.8厚 镀锡	
螺丝	钢, M3螺帽	

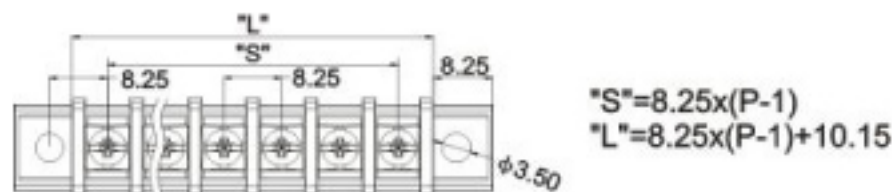

订购方式:

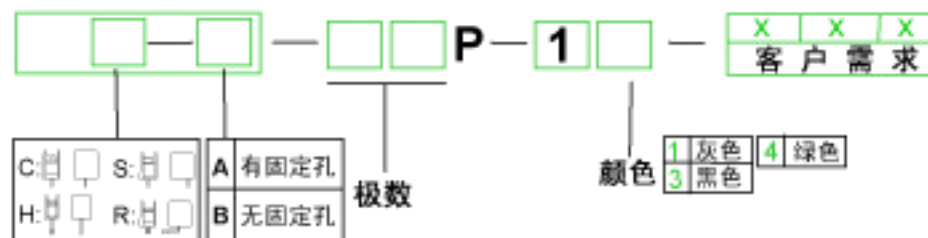

极数	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	18.40	26.65	34.90	43.15	51.40	59.65	67.90	76.15	84.40	92.65	100.90	109.15	117.40	125.65
S(mm)	8.25	16.50	24.75	33.00	41.25	49.50	57.75	66.00	74.25	82.50	90.75	99.00	107.25	115.50
极数	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	133.90	142.15	150.40	158.65	166.90	175.15	183.40	191.65	199.90	208.15	216.40			
S(mm)	23.75	32.00	40.25	48.50	56.75	65.00	73.25	81.50	89.75	98.00	106.25			

	<b>中国·康伟电子有限公司</b>
	<b>NAME KV35S-A</b>