




康伟栅栏式PCB接线端子

产品规格书

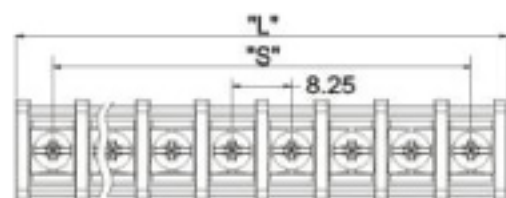


$$"S"=8.25 \times (P-1)$$

$$"L"=8.25 \times (P-1) + 10.15$$

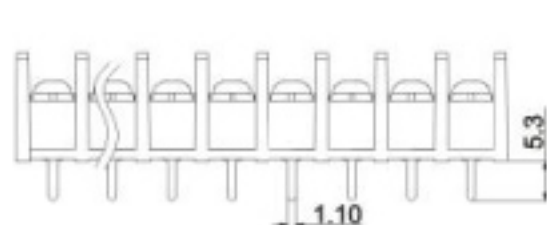

认证	UL	CE
电气性能		
参考标准	UL	IEC
额定电压	300V	450V
额定电流	20A	24A
导线线径	22-12AWG	2.5mm ²
耐电压		AC2000V/1Min
绝缘阻抗		500MΩ/DC500V
机械性能		
最大锁紧扭力		0.5Nm/4.4Lb.in
环境温度		-40℃~+105℃
尺寸		
间距		8.25mm(.325")
极数		2P-26P
材质及电镀		
塑件		PA66, UL94V-0
端子		黄铜, 0.8mm 镀锡
螺丝		钢, M3镀锌

订购方式:

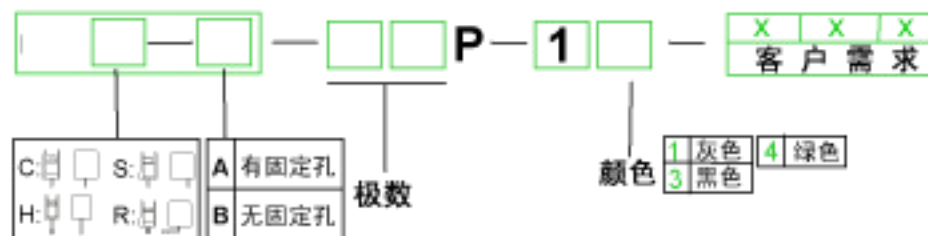

极数	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	18.40	26.65	34.90	43.15	51.40	59.65	67.90	76.15	84.40	92.65	100.90	109.15	117.40	125.65
S(mm)	8.25	16.50	24.75	33.00	41.25	49.50	57.75	66.00	74.25	82.50	90.75	99.00	107.25	115.50
极数	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	133.90	142.15	150.40	158.65	166.90	175.15	183.40	191.65	199.90	208.15	216.40			
S(mm)	8.25	8.25	8.25	8.25	8.25	8.25	8.25	8.25	8.25	8.25	8.25	8.25	8.25	8.25

	中国·康伟电子有限公司
	NAME KV35C-B