



康伟栅栏式PCB接线端子

产品规格书

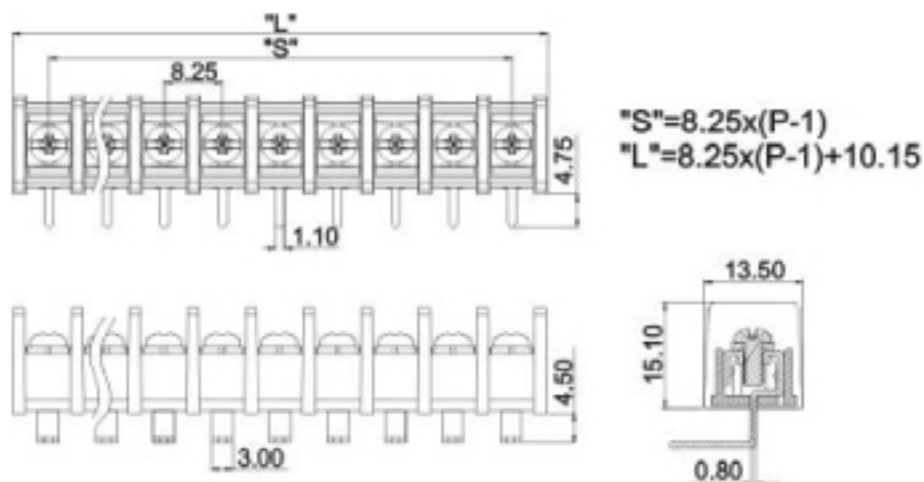

认证	UL	CE
电气性能	UL	IEC
参考标准	UL	IEC
额定电压	300V	450V
额定电流	20A	24A
导线线径	22-12AWG	2.5mm ²
耐电压	AC2000V/1Min	
绝缘阻抗	500MΩ/DC500V	
机械性能		
最大锁紧扭力	0.5Nm/4.4Lb.in	
环境温度	-40℃~+105℃	
尺寸		
间距	8.25mm(.325")	
极数	2P-26P	
材质及电镀		
塑件	PA66, UL94V-0	
端子	黄铜, 0.8厚 镀锡	
螺丝	钢, M3镀锌	

订购方式:

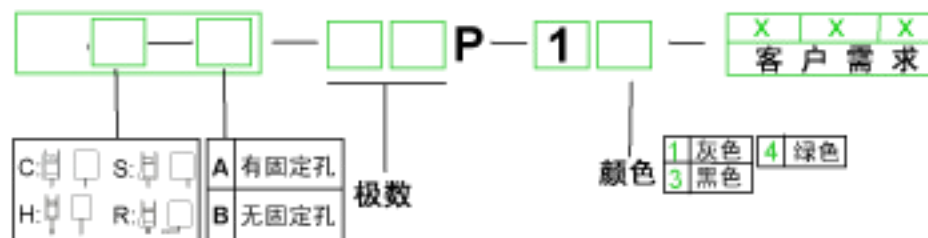

极数	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	18.40	26.65	34.90	43.15	51.40	59.65	67.90	76.15	84.40	92.65	100.90	109.15	117.40	125.65
S(mm)	8.25	16.50	24.75	33.00	41.25	49.50	57.75	66.00	74.25	82.50	90.75	99.00	107.25	115.50
极数	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	33.90	42.15	50.40	58.65	66.90	75.15	83.40	91.65	99.90	108.15	116.40			
S(mm)	22.75	31.00	39.25	47.50	55.75	64.00	72.25	80.50	88.75	97.00	105.25			

		中国·康伟电子有限公司
	NAME	KV35R-B