
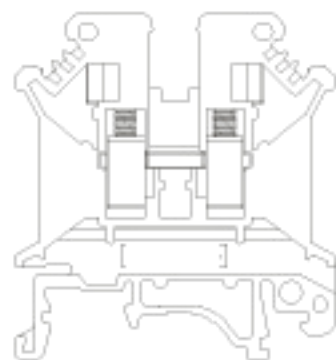
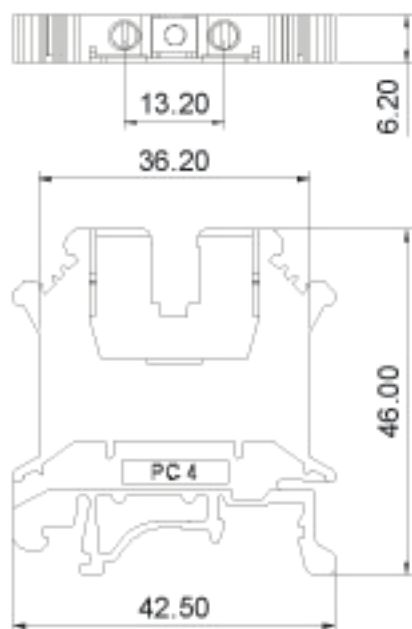



# 康伟UK导轨式接线端子

产品规格书

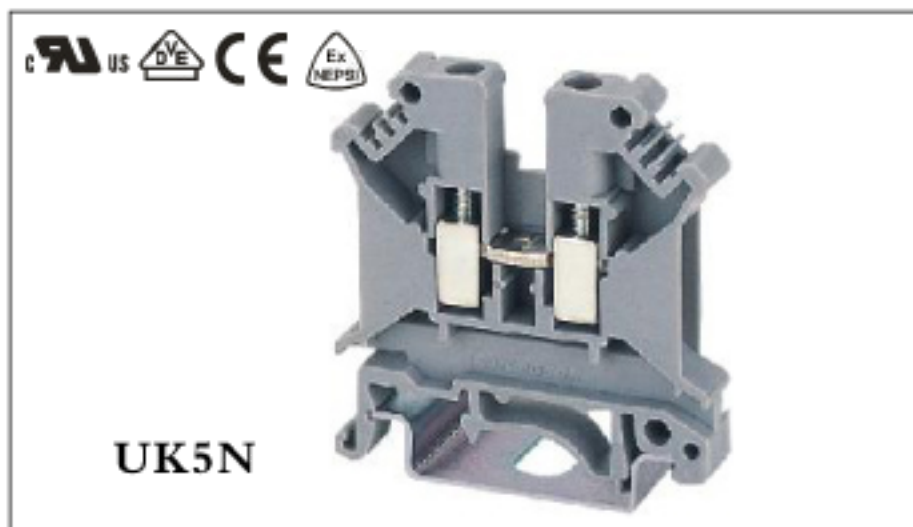

认证	UL US		CE
性能			
标准	UL	IEC	
额定电压	600V	600V	
额定电流	30A	32A	
线径	24-10AWG	0.2-4.0mm <sup>2</sup>	
厚度/高度/绝缘厚		6.2/42.5/1.6mm	
高度 (NS35 7.5/NS35-15/NS32)		47/54 5/52mm	
额定冲击电压/污染等级		8kV/3	
制成长度		8mm	
螺钉规格/扭矩		M3/0.5N.m	
基材		A4	
绝缘材料/阻燃等级		PAV-0	
说明	型号	包装数	
(1) 端子	PC 4	50	
(2) 盖板	D-PC 2.5	50	
(3) 固定式接件	FBI 2-6 FBI 3-6 FBI 5-6 FBI 10-6	10 10 10 10	
(4) 旋转接件			
(5) 边插接件	EB 2-6 EB 3-6 EB 10-6	100 100 10	
(6) 带绝缘垫块接件, 10位	ISBI 10-6	10	
(7) 带绝缘垫块	IS-K4	100	
(8) 开关接件	USBR 3-7	1	
(9) 隔片	TS-K	50	
(10) 分插隔板, 厚1.5mm	ATP-PC	50	
(11) 测试插孔座	DSB 3/10/4	100	
(12) 绝缘测试插孔座	DSBI 3/13/4	100	
(13) 标记条	ZB6		

订购方式:

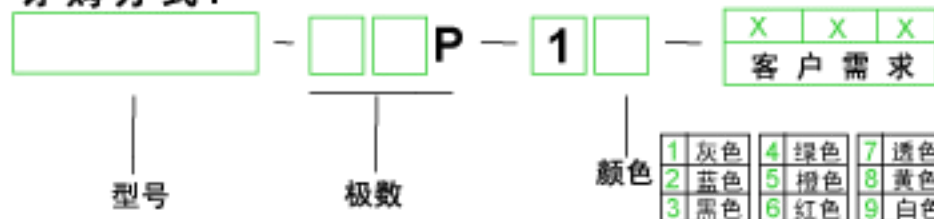

 mm (INCH)	 中国·康伟电子有限公司
 TRIANGLE ORIENTATION	NAME                      UK5N