
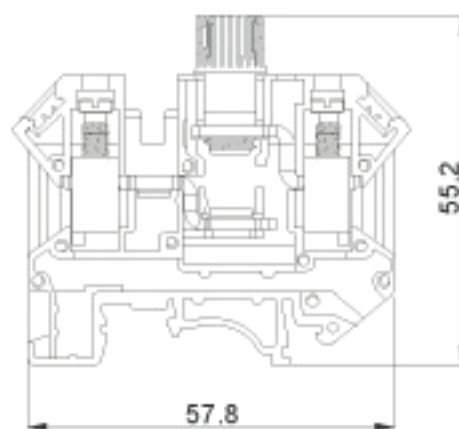



康伟UK导轨式接线端子

产品规格书

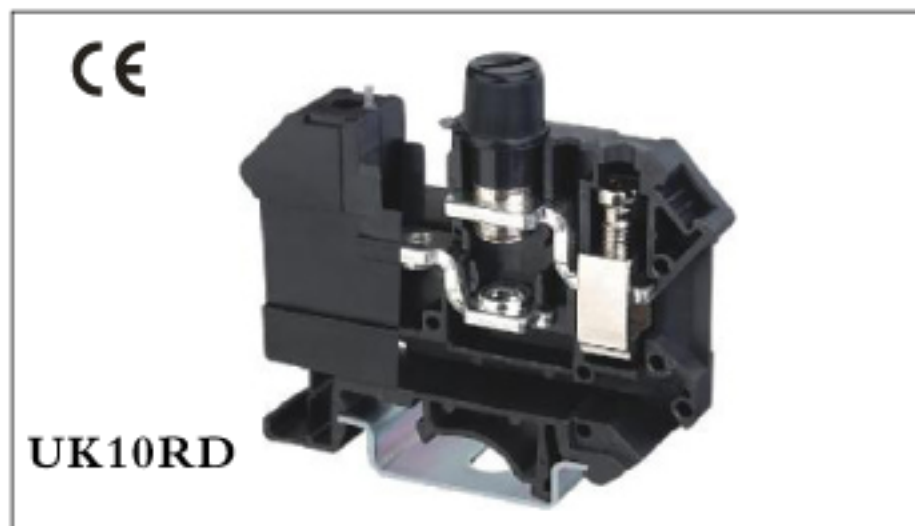

认证	CE	
性能		
标准	UL	IEC
额定电压	600V	800V
额定电流	10A	10A
线径	20-6AWG	0.5-16mm²
厚度/高度/绝缘厚		12/32mm
高度(NS35.7.5/NS35.15/NS32)		59/66.5/64mm
额定冲击电压/污染等级		4kV/3
制造长度		11mm
螺钉规格/扭矩		M4/1.2N.m
基板		B5
绝缘材料/阻燃等级		PAV-0
说明	型号	包装数
(1)端子	PC 10-DR(5X20mm) PC 10-DR(6.3X32mm) PC 10-DR(5X25mm)	50 50 50
(2)固定式桥接件	FBI 10-12	10
(3)边锁式桥接件	EB 10-12	10
(4)测试插孔座	DSB 4/7/6	100
(3)绝缘测试插孔座	DSBU 4/15/6	
(4)标记条	Z88	

订购方式：

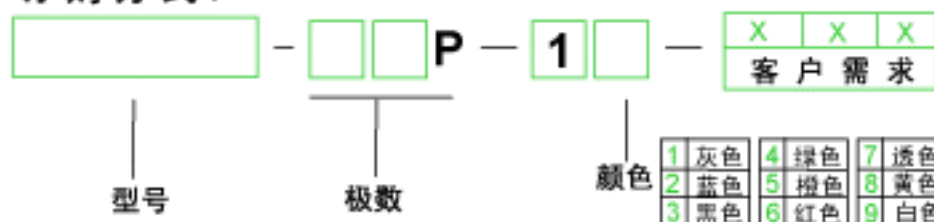

mm (INCH)	KANGWEI 中国·康伟电子有限公司
NAME	UK10RD