

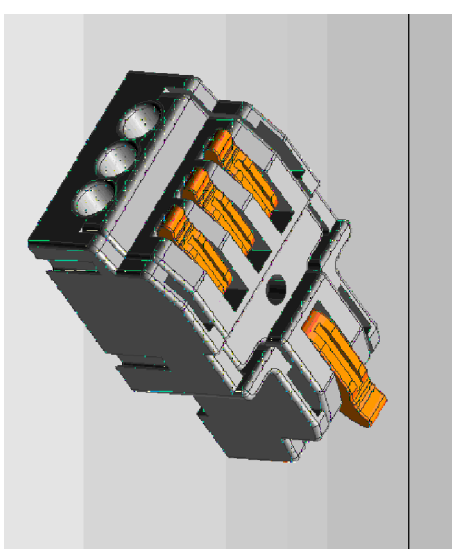


精度等级/General	tolerance/(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50	±Z	±Z	±Z	±Z

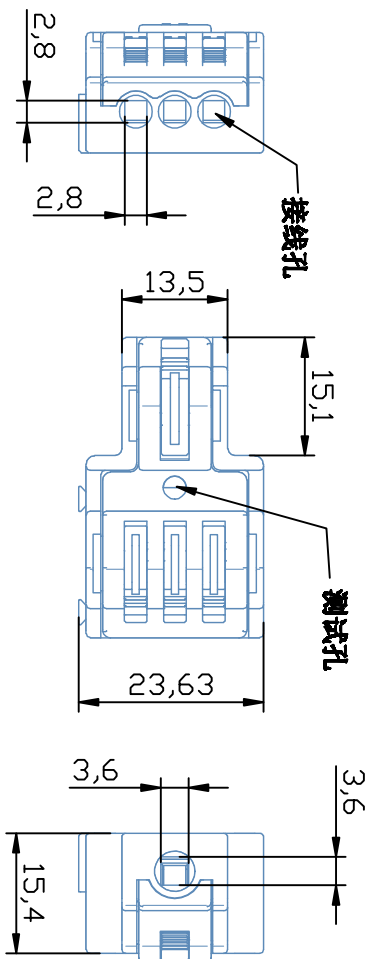

4	排线扣	不锈钢	301
3	导电弹	紫铜	
2	Cover	PA66	UL94V-2
1	Housing	PC	UL94V-2
ITEM NAME OF PART MATERIAL NOTES			
UL 标准/UL Standard: B C D			
额定电压/电涌/Rated Voltage(V)/Current(A) 450 / / 32A			
IEC 标准/IEC Standard: / /			
过压类别/Overvoltage Category/污染等级 III/2			
额定电压/电涌/Rated Voltage(V)/Current(A) 450/32			
额定脉冲电压(kV)/Rate Impulse Voltage(kV) 8.0			
拉力/pull(N/m/Lb.in) 0.8/8			
线控箱围(连续mm*线-线), (出线mm*线-线) 6-4/4-2.5			
间距/Pitch(mm)/线束范围/Poles 5/N=02~5P			
剥线长度/Stripping length(mm) 10-12			
使用温度范围/Operating Temperature(°C) -40~+105			
符合RoHS环保要求/Conform to RoHS Yes			
标准颜色编号/Standard color number: /			
PANTONE / RAL			
MATERIAL: /		SURFACE: /	
MAT NO.: /			
STATUS: /			

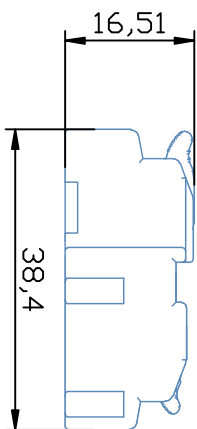

中国·康伟电子有限公司
China Kamei Electronics Co., Ltd

APPD: Lon CHH2020.03.24
CHKD: Gong YZ2020.03.24
NAME: KV231-13

DRT: CENGWZ_2018.10.18
DRAWING NO.: KV231-13

REV	ECN	DESCRIPTION	DRT	DATE	SIZE: A4	TYPE: CUSTOMER_DRAWING	SCALE: 2:1	REV	TO
1								1/1	TO