
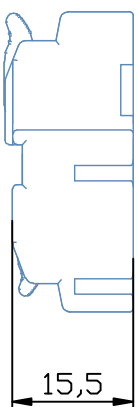
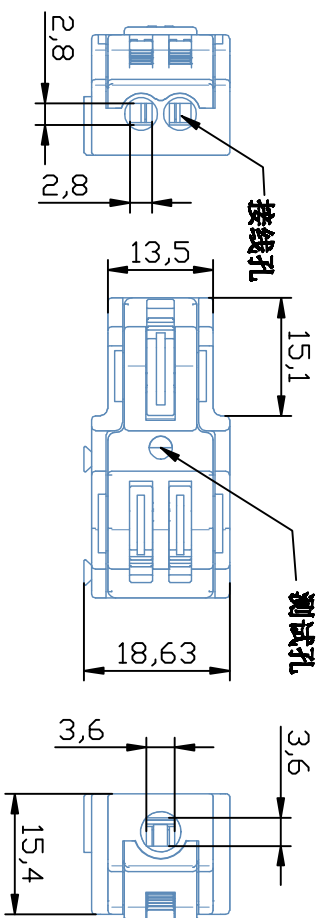


精度等级/General	tolerance/(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50			

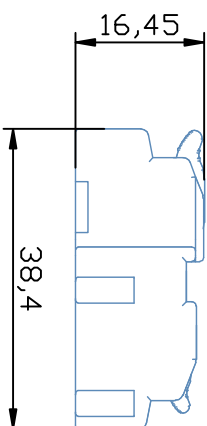

4	排线扣	不锈钢	301
3	导电片	紫铜	
2	Cover	PA66	UL94V-2
1	Housing	PC	UL94V-2
ITEM	NAME	PART	MATERIAL
UL 标准 / UL Standard			NOTES
额定电压/电涌/Rated Voltage(V)/Surge(V)	450	/	32A
IEC 标准/IEC Standard			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/2		
额定电压/电涌/Rated Voltage(V)/Current(A)	450/32		
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8.0		
拉力/pull(N/m/Lb.in)	0.8/8		

线控箱围(连续mm*线-线)/出线mm*线-线)	6-4/4-2.5
间距/Pitch(mm)/线束范围/Poles	5/N=02~5P
剥线长度/Stripping length(mm)	10-12
使用温度范围/Operating Temperature(°C)	-40~+105
符合RoHS环保要求/Conform to RoHS	Yes
标准颜色编号/Standard color number:	/
PANTONE / RAL	/

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: Lon CHH2020.03.24

CHKD: Gong YZ2020.03.24

DRT: CENGWZ_2018.10.18



NAME: KV231-12

DRAWING NO.: KV231-12

TYPE: CUSTOMER_DRAWING SCALE: 2:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRT	DATE	REV	TO
						1/1

1 2 3 4 5 6