


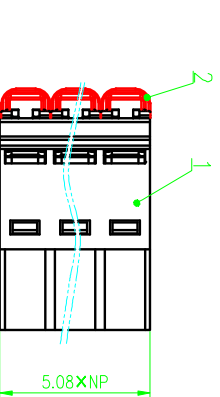

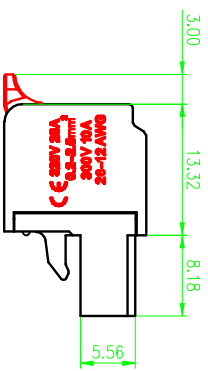


公差表 / General Tolerances(mm)														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1.0	
~	~	~	~	~	~	~	~	~	~	~	~	~		~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z
±Z	±Z	±Z	±Z	±Z	±Z	±Z	±Z	±Z	±Z	±Z	±Z	±Z	±Z	



ITEM	NAME OF PART	MATERIAL	NOTES
1	壳体	PA66	UL94V-0
2	操作杆	PA66	UL94V-0
3	夹子	磷青铜	Sn Plated
4	压线框	301不锈钢	/

UL 标准 /UL Standard:	B	C	D
额定电压/电涌 /Rated Voltage(V)/Current(A)	300/15	/	300/15
EC 标准 /EC Standard:			
过压类别 /Overvoltage Category/行架等	III/3	III/2	II/2
爬电 /Pollution Degree	/	300/15	/
额定电压/电涌 /Rated Voltage(V)/Current(A)	/	300/15	/
额定脉冲电压 (KV) /Rate Impulse Voltage(KV)	/	4	/
线径范围 (硬线和软线) /Wire Range(rigid and flexible)(mm ² /AWG)	0.2~2.5/24~12		
间距 /Pitch(mm) /线数范围 /Poles	5.08 /N=02~24P		
剥线长度 /Stripping length(mm)	9~10		
使用温度范围 /Operating temperature(°C)	-40~+105		
符合RoHS环保要求 /Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

MAT NO.: / STATUS: / APPD: 2023.04.08 / CHKD: 2023.04.08 / NAME: KANGWEI WEIELECTRONICS CO.,LTD

DRAWING NO.: KSK-5.08 / TYPE: CUSTOMER_DRAWING / SCALE: 2:1 / SHEET: 1/1

REV: T0-1

REV: / ECN: / DESCRIPTION: / DFT: / DATE: / SIZE: A4 / mm / (inch) /

1

2

3

4

5

6

D

C

B

A