

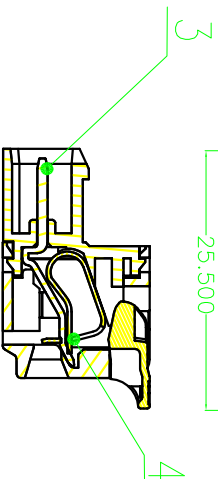
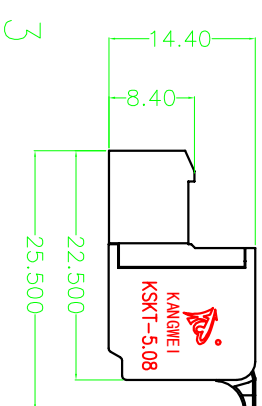

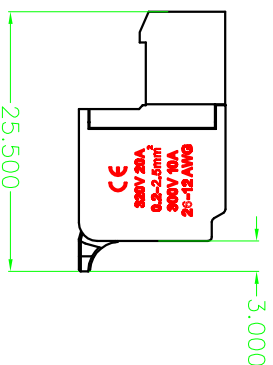

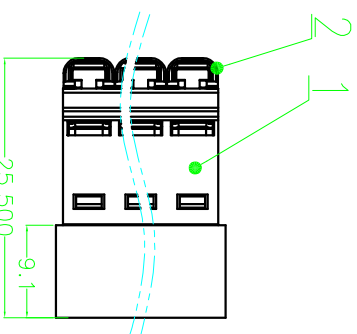


公差/General Tolerances(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.43	±0.51	±0.57	±0.63	±0.70	±0.78	±0.85	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
±Z																		



截面 B-B

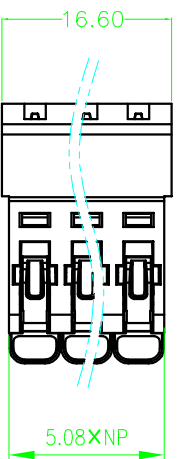

ITEM	NAME OF PART	MATERIAL	NOTES
4	压线框	301不锈钢	/
3	铜针	65#黄铜	/
2	操作杆	PA66	UL94V-0
1	壳体	PA66	UL94V-0

UL 标准/UL Standard:			
额定电压/电压/Rated Voltage(V)	300/15	C	D
额定电流/电流/Rated Current(A)	300/15	/	300/15
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污秽等级/ Pollution Degree	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)	/	300/15	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	4	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	0.2~2.5/24~12		
可剥长度/Stripping length(mm)	5.08/N=02~24P		
剥线长度/Stripping length(mm)	9~10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合环保要求/Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: 2023.04.08

CHKD: 2023.04.08

DRFT: 2023.4.08

**康伟电子有限公司**  
KANGWEI WEIELECTRONICS CO.,LTD

KSKT-5.08

DRAWING NO.: KSKT-5.08

TYPE: CUSTOMER\_DRAWING

SCALE: 2:1

REV	ECN	DESCRIPTION	DRFT	DATE
1				
2				
3				
4				

SIZE: A4

REV TO-1

SHEET 1/1