



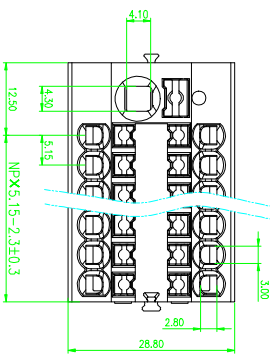




精度等级/General Tolerances(mm)		精度等级/General Tolerances(mm)										精度等级/General Tolerances(mm)	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50



ITEM	NAME OF PART	MATERIAL	NOTES
4	弹片	301 不锈钢	/
3	紧固件	紫铜	Sn Plated
2	按钮	PA66	UL94V-0
1	壳体	PA66	UL94V-0

UL 标准 /UL Standard:		B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	690/24	/	690/24	/
IEC 标准 /IEC Standard:				
过压类别 /Overvoltage Category/污染等级	III/3	III/2	II/2	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	690/41	/
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	/	4	/	/
额定峰值电压(kV)/Rate Impulse Voltage(kV)	0.2-4/0.5-6/10	/	/	/
柱状直径/外径/柱状长度/Stripping length(mm)	5.15/N=02~12P	8-10	/	/
使用温度范围 /Operating temperature(°C)	-40~+105	/	/	/
符合RoHS环保要求 /Conform to RoHS	Yes	/	/	/

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: 2023.04.08
 CHKD: 2023.04.08
 DRT: 2023.8.03

NAME: **康伟电子有限公司**
KANGWEI WEIELECTRONICS CO.,LTD

DRAWING NO.: KV225B-5.15
 TYPE: CUSTOMER_DRAWING
 SCALE: 2:1
 REV: TO-1
 SHEET: 1/1

REV	ECN	DESCRIPTION	DRT	DATE	SIZE: A4	TYPE: CUSTOMER_DRAWING	SCALE: 2:1	REV	SHEET
								TO-1	1/1